



Ice for every need



www.bremaice.it



2025

Catalogue

ENG



# We are Brema



For over 40 years, we have been giving ice a new shape, transforming it into a leading ingredient.

Our machines, the result of advanced technologies developed in-house by our [Research and Development](#) department, represent the highest standard in the industry.

Every component is meticulously designed to simplify daily operations and precisely meet the needs of the most demanding professionals.

[Innovation, quality, and customer focus](#) are the values that guide us and make us a benchmark in the world of professional ice.



Scan the QR code and  
take a virtual tour of  
the company!

# Our Ice Types

## B-Qube




A cubic shape with a distinctive design [registered](#) by Brema.

Crystalline, durable, and highly refrigerating.

Designed for the world of mixology — its [slow dilution](#) ensures that the first sip is just as good as the last.

## Ice Cube

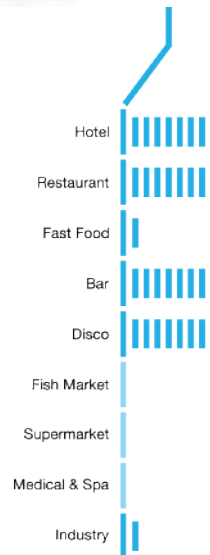

A truncated cone shape with slightly flattened sides. Available in various weights, it adapts to any glass shape.

Maximum flexibility, maximum performance.

Crystalline and compact, it [cools without watering down](#).

Elegant in the glass, powerful in performance.

## Fast Ice



Truncated pyramid shape. Weighs approximately 7 grams and features multiple facets. [Quickly transmits cold](#) to beverages.

Small and versatile, it fits any glass shape.

# Ice Finger



Thimble-shaped. Thanks to the immersion system combined with paddle technology, it can be made using any type of water — even hard water with high mineral content. Its specific shape significantly increases the cooling surface, making it ideal for serving carbonated beverages.

# Ice Pebbles




Quick and efficient cooling effect, easy to store, handle, and portion. Ideal for preparing muddled cocktails. This is compressed ice with a low water content, making it last longer.

# Ice Flakes



Ideal for displaying and presenting food, but also suitable for use in the chemical, pharmaceutical, and sports sectors. Fast and effective cooling effect. Easy to store, handle, and dose by weight and volume.

# Ice Scales

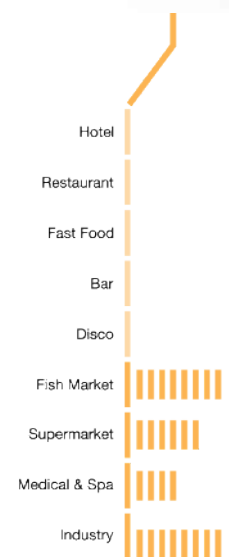

Perfect for processing, transporting, and preserving food products. 100% ice, with a variable thickness from 1.5 to 3 mm. Dispensing temperature from -5°C to -10°C. Easy to store, handle, and dose.

# Certified



At Brema Group, [quality means reliable machines](#), tested to operate continuously even under [thermal stress](#).

The numerous certifications we have obtained attest to [the safety and reliability of our processes and products](#), in compliance with [the highest international standards](#).

Based on the [reference model](#) and the [country of destination](#), Brema Group will provide detailed information on the certifications available among those mentioned, always ensuring full compliance with local regulations and customer requirements.



Additionally, our laboratory is recognized as a [CTF \(Customer Testing Facility\)](#) by the [IEC \(International Electrotechnical Commission\)](#) under the [IEC System of Conformity Assessment Schemes for Electrotechnical Equipment and Components \(IECEE\)](#), for conducting internal tests in accordance with the electrical safety standards applicable to our products.

# Our Ice Machines



Ice Cube

CB series  
C Series  
Special Series



B-Qube

CB series  
C series



Fast Ice

VB series  
VM series



Ice Finger

IMF series



Ice Pebbles

TB series  
TM series  
Special series



Ice Flakes


GB series  
G series



Ice Scales

Muster series

# Ice Cube

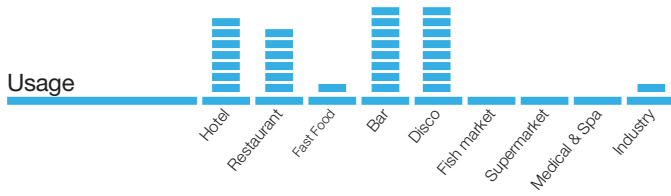

## CB Series



### CB 184 ABS



| Version  | Kind of Cube | Production 24h* | Storage Capacity | Power consump.** | Fuse |
|----------|--------------|-----------------|------------------|------------------|------|
| Air HC   | D            | 21 kg           | up to 4 kg       | 260 W            | 10 A |
| Water HC | D            | 21 kg           | up to 4 kg       | 260 W            | 10 A |

Sizes (WxDxH): 355 x 404 x 590<sup>•</sup> mm; Net Weight: 27,5 kg

Package Dimensions (WxDxH): 415 x 445 x 780 mm; Gross Weight: 34 kg; Package Volume: 0,144 m<sup>3</sup>

### CB 184 INOX



| Version  | Kind of Cube | Production 24h* | Storage Capacity | Power consump.** | Fuse |
|----------|--------------|-----------------|------------------|------------------|------|
| Air HC   | D            | 21 kg           | up to 4 kg       | 260 W            | 10 A |
| Water HC | D            | 21 kg           | up to 4 kg       | 260 W            | 10 A |

Sizes (WxDxH): 355 x 404 x 590<sup>•</sup> mm; Net Weight: 27,5 kg

Package Dimensions (WxDxH): 415 x 445 x 780 mm; Gross Weight: 34 kg; Package Volume: 0,144 m<sup>3</sup>

### CB 246



| Version   | Kind of Cube | Production 24h* | Storage Capacity | Power consump.** | Fuse |
|-----------|--------------|-----------------|------------------|------------------|------|
| Air HC    | A, C, D, E   | 26 kg           | up to 6 kg       | 270 W            | 10 A |
| Water HC  | A, C, D, E   | 26 kg           | up to 6 kg       | 270 W            | 10 A |
| Air HC DP | A, C, D, E   | 26 kg           | up to 6 kg       | 270 W            | 10 A |

Sizes (WxDxH): 387 x 470 x 607<sup>•</sup> mm; Net Weight: 31 kg

Package Dimensions (WxDxH): 440 x 520 x 780 mm; Gross Weight: 37 kg; Package Volume: 0,178 m<sup>3</sup>

\* Ambient temperature +21° C - Water temperature +15° C \*\* Ambient temperature +43° C

<sup>•</sup> Plus foot 5 mm

Photos are for representative purposes only



# CB Series

## CB 640




| Version                                                                                     | Kind of Cube | Production 24h* | Storage Capacity | Power consump.** | Fuse |
|---------------------------------------------------------------------------------------------|--------------|-----------------|------------------|------------------|------|
| Air HC     | A, C, D, E   | 72 kg           | up to 40 kg      | 590 W            | 10 A |
| Water HC   | A, C, D, E   | 72 kg           | up to 40 kg      | 590 W            | 10 A |
| Air HC DP  | A, C, D, E   | 72 kg           | up to 40 kg      | 590 W            | 10 A |

Sizes (WxDxH): 735 x 603 x 850\*\* mm; Net Weight: 67 kg

Package Dimensions (WxDxH): 780 x 640 x 1015 mm; Gross Weight: 79 kg; Package Volume: 0,507 m<sup>3</sup>

## CB 840




| Version                                                                                     | Kind of Cube | Production 24h* | Storage Capacity | Power consump.** | Fuse |
|---------------------------------------------------------------------------------------------|--------------|-----------------|------------------|------------------|------|
| Air HC     | A, C, D, E   | 80 kg           | up to 40 kg      | 700 W            | 10 A |
| Water HC   | A, C, D, E   | 80 kg           | up to 40 kg      | 700 W            | 10 A |
| Air HC DP  | A, C, D, E   | 80 kg           | up to 40 kg      | 700 W            | 10 A |

Sizes (WxDxH): 735 x 603 x 910\*\* mm; Net Weight: 71 kg

Package Dimensions (WxDxH): 780 x 640 x 1085 mm; Gross Weight: 83 kg; Package Volume: 0,542 m<sup>3</sup>

## CB 955



| Version                                                                                       | Kind of Cube | Production 24h* | Storage Capacity | Power consump.** | Fuse |
|-----------------------------------------------------------------------------------------------|--------------|-----------------|------------------|------------------|------|
| Air HC     | A, C, D, E   | 95 kg           | up to 55 kg      | 870 W            | 10 A |
| Water HC   | A, C, D, E   | 95 kg           | up to 55 kg      | 870 W            | 10 A |
| Air HC DP  | A, C, D, E   | 95 kg           | up to 55 kg      | 870 W            | 10 A |

Sizes (WxDxH): 735 x 603 x 1010\*\* mm; Net Weight: 74 kg

Package Dimensions (WxDxH): 780 x 640 x 1185 mm; Gross Weight: 86 kg; Package Volume: 0,592 m<sup>3</sup>

## CB 1265



| Version                                                                                       | Kind of Cube  | Production 24h* | Storage Capacity | Power consump.** | Fuse |
|-----------------------------------------------------------------------------------------------|---------------|-----------------|------------------|------------------|------|
| Air HC     | A, C, D, E, B | 134 kg          | up to 65 kg      | 900 W            | 16 A |
| Water HC   | A, C, D, E, B | 134 kg          | up to 65 kg      | 900 W            | 16 A |
| Air HC DP  | A, C, D, E, B | 134 kg          | up to 65 kg      | 900 W            | 16 A |

Sizes (WxDxH): 840 x 740 x 1075\*\* mm; Net Weight: 113 kg

Package Dimensions (WxDxH): 880 x 785 x 1245 mm; Gross Weight: 133 kg; Package Volume: 0,860 m<sup>3</sup>




\* Ambient temperature +21° C - Water temperature +15° C \*\* Ambient temperature +43° C

•• Plus adjustable foot 110 - 150 mm  
Photos are for representative purposes only

# CB Series

## CB 1565



| Version                                                                                     | Kind of Cube  | Production 24h* | Storage Capacity | Power consump.** | Fuse |
|---------------------------------------------------------------------------------------------|---------------|-----------------|------------------|------------------|------|
| Air HC     | A, C, D, E, B | 152 kg          | up to 65 kg      | 1280 W           | 16 A |
| Water HC   | A, C, D, E, B | 152 kg          | up to 65 kg      | 1280 W           | 16 A |
| Air HC DP  | A, C, D, E, B | 152 kg          | up to 65 kg      | 1280 W           | 16 A |

Sizes (WxDxH): 840 x 740 x 1075\*\* mm; Net Weight: 118 kg

Package Dimensions (WxDxH): 880 x 785 x 1245 mm; Gross Weight: 138 kg; Package Volume: 0,860 m<sup>3</sup>





# C Series



## C 150



| Version                                                                                      | Kind of Cube  | Production 24h* | Usable bin           | Power consump.** | Fuse |
|----------------------------------------------------------------------------------------------|---------------|-----------------|----------------------|------------------|------|
| Air HC    | A, C, D, E, B | 150 kg          | Bin 240PE<br>Bin 200 | 1220 W           | 16 A |
| Water HC  | A, C, D, E, B | 150 kg          | Bin 350              | 1220 W           | 16 A |

Sizes (WxDxH): 862 x 555 x 720 mm; Net Weight: 110 kg

Package Dimensions (WxDxH): 945 x 645 x 980 mm; Gross Weight: 128 kg; Package Volume: 0,597 m<sup>3</sup>

\* Ambient temperature +21° C - Water temperature +15° C \*\* Ambient temperature +43° C

•• Plus adjustable foot 110 - 150 mm  
Photos are for representative purposes only

# C Series

## C 300



| Version | Kind of Cube  | Production 24h* | Usable bin | Power consump.** | Fuse |
|---------|---------------|-----------------|------------|------------------|------|
| Air     | A, C, D, E, B | 300 kg          | Bin 350    | 3000 W           | 32 A |
| Water   | A, C, D, E, B | 300 kg          |            | 3000 W           | 32 A |

Sizes (WxDxH): 1250 x 580 x 848 mm; Net Weight: 152 kg

Package Dimensions (WxDxH): 1335 x 705 x 1005 mm; Gross Weight: 178 kg; Package Volume: 0,946 m<sup>3</sup>

## C 300 Split



| Version | Kind of Cube  | Production 24h* | Usable bin | Power consump.** | Cooling capacity*** |
|---------|---------------|-----------------|------------|------------------|---------------------|
| Remote  | A, C, D, E, B | 300 kg          | Bin 350    | 200 W            | 6000 W              |
| Rack    | A, C, D, E, B | 300 kg          |            | 200 W            | 6000 W              |

Sizes (WxDxH): 990 x 585 x 850 mm; Net Weight: 97 kg

Remote Package Dimensions (WxDxH): 1335 x 705 x 1005; Gross Weight: 107 kg; Package Volume: 0,946 m<sup>3</sup>

Rack Package Dimensions (LxPxH): 1210 x 800 x 1095 mm; Gross Weight: 107 kg; Package Volume: 1,060 m<sup>3</sup>

# Special Series



## Fresh Maker HC



| Version | Kind of Cube | Production 24h* | Storage Capacity | Power consump.** | Fuse |
|---------|--------------|-----------------|------------------|------------------|------|
| Water   | D            | 21 kg           | up to 4 kg       | 205 W            | 10 A |

Sizes (WxDxH): 540 x 430 x 435<sup>•</sup> mm; Net Weight: 32,5 kg

Package Dimensions (WxDxH): 590 x 490 x 620 mm; Gross Weight: 39,5 kg; Package Volume: 0,179 m<sup>3</sup>

\* Ambient temperature +21° C - Water temperature +15° C    \*\* Ambient temperature +43° C  
 \*\*\* at the temperature specified in the technical data sheet    • Plus foot 5 mm  
 Photos are for representative purposes only

# Special Series

## HIKU 26



| Version                                                                                  | Kind of Cube | Production 24h* | Storage Capacity | Power consump.** | Fuse |
|------------------------------------------------------------------------------------------|--------------|-----------------|------------------|------------------|------|
| Air HC  | D            | 24 kg           | up to 7 kg       | 290 W            | 10 A |

Sizes (WxDxH): 395 x 530 x 790<sup>•</sup> mm; Net Weight: 41 kg

Package Dimensions (WxDxH): 430 x 580 x 970 mm; Gross Weight: 48 kg; Package Volume: 0,242 m<sup>3</sup>

## DSS 42



| Version                                                                                  | Kind of Cube | Production 24h* | Storage Capacity | Power consump.** | Fuse |
|------------------------------------------------------------------------------------------|--------------|-----------------|------------------|------------------|------|
| Air HC  | D            | 44 kg           | up to 12 kg      | 365 W            | 10 A |

Sizes (WxDxH): 500 x 630 x 920 mm; Net Weight: 66 kg

Package Dimensions (WxDxH): 540 x 770 x 1090 mm; Gross Weight: 74 kg; Package Volume: 0,453 m<sup>3</sup>

## IC 18



| Version                                                                                    | Kind of Cube | Production 24h* | Storage Capacity | Power consump.** | Fuse |
|--------------------------------------------------------------------------------------------|--------------|-----------------|------------------|------------------|------|
| Air HC  | D            | 22 kg           | up to 4 kg       | 215 W            | 10 A |

Sizes (WxDxH): 540 x 430 x 470<sup>•</sup> mm; Net Weight: 32,5 kg

Package Dimensions (WxDxH): 590 x 490 x 620 mm; Gross Weight: 39,5 kg; Package Volume: 0,179 m<sup>3</sup>

## IC 24



| Version                                                                                    | Kind of Cube | Production 24h* | Storage Capacity | Power consump.** | Fuse |
|--------------------------------------------------------------------------------------------|--------------|-----------------|------------------|------------------|------|
| Air HC  | A, D         | 26 kg           | up to 6 kg       | 255 W            | 10 A |

Sizes (WxDxH): 595 x 510 x 502<sup>•</sup> mm; Net Weight: 38 kg


Package Dimensions (WxDxH): 635 x 555 x 650 mm; Gross Weight: 45 kg; Package Volume: 0,229 m<sup>3</sup>

\* Ambient temperature +21° C - Water temperature +15° C    \*\* Ambient temperature +43° C

<sup>•</sup> Plus foot 5 mm

Photos are for representative purposes only

# B-Qube

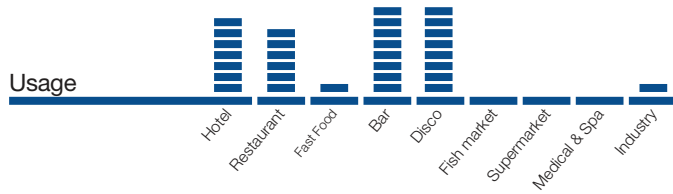

## CB Series



### CB 246 B-QUBE



| Version   | Kind of Cube | Production 24h* | Storage Capacity | Power consump.** | Fuse |
|-----------|--------------|-----------------|------------------|------------------|------|
| Air HC    | Q-23g        | 26 kg           | up to 6 kg       | 270 W            | 10 A |
| Water HC  | Q-23g        | 26 kg           | up to 6 kg       | 270 W            | 10 A |
| Air HC DP | Q-23g        | 26 kg           | up to 6 kg       | 270 W            | 10 A |

Sizes (WxDxH): 387 x 470 x 607<sup>•</sup> mm; Net Weight: 31 kg

Package Dimensions (WxDxH):: 440 x 520 x 780 mm; Gross Weight: 37 kg; Package Volume: 0,178 m<sup>3</sup>

### CB 249 B-QUBE



| Version   | Kind of Cube | Production 24h* | Storage Capacity | Power consump.** | Fuse |
|-----------|--------------|-----------------|------------------|------------------|------|
| Air HC    | Q-23g        | 29 kg           | up to 9 kg       | 270 W            | 10 A |
| Water HC  | Q-23g        | 29 kg           | up to 9 kg       | 270 W            | 10 A |
| Air HC DP | Q-23g        | 29 kg           | up to 9 kg       | 270 W            | 10 A |

Sizes (WxDxH): 387 x 470 x 687<sup>•</sup> mm; Net Weight: 32 kg

Package Dimensions (WxDxH): 440 x 520 x 860 mm; Gross Weight: 38 kg; Package Volume: 0,197 m<sup>3</sup>

### CB 316 B-QUBE



| Version   | Kind of Cube | Production 24h* | Storage Capacity | Power consump.** | Fuse |
|-----------|--------------|-----------------|------------------|------------------|------|
| Air HC    | Q-23g        | 38 kg           | up to 16 kg      | 340 W            | 10 A |
| Water HC  | Q-23g        | 38 kg           | up to 16 kg      | 340 W            | 10 A |
| Air HC DP | Q-23g        | 38 kg           | up to 16 kg      | 340 W            | 10 A |

Sizes (WxDxH): 497 x 592 x 687<sup>••</sup> mm; Net Weight: 40 kg




Package Dimensions (WxDxH): 550 x 660 x 860 mm; Gross Weight: 48 kg; Package Volume: 0,312 m<sup>3</sup>

\* Ambient temperature +21° C - Water temperature +15° C \*\* Ambient temperature +43° C  
<sup>•</sup> Plus foot 5 mm <sup>••</sup> Plus adjustable foot 110 - 150 mm  
 Photos are for representative purposes only

# CB Series

## CB 416 B-QUBE






| Version                                                                                     | Kind of Cube | Production 24h* | Storage Capacity | Power consump.** | Fuse |
|---------------------------------------------------------------------------------------------|--------------|-----------------|------------------|------------------|------|
| Air HC     | Q-23g        | 42 kg           | up to 16 kg      | 450 W            | 10 A |
| Water HC   | Q-23g        | 42 kg           | up to 16 kg      | 450 W            | 10 A |
| Air HC DP  | Q-23g        | 42 kg           | up to 16 kg      | 450 W            | 10 A |

Sizes (WxDxH): 497 x 592 x 687\*\* mm; Net Weight: 43 kg

Package Dimensions (WxDxH): 550 x 660 x 860 mm; Gross Weight: 51 kg; Package Volume: 0,312 m<sup>3</sup>

## CB 425 B-QUBE






| Version                                                                                     | Kind of Cube | Production 24h* | Storage Capacity | Power consump.** | Fuse |
|---------------------------------------------------------------------------------------------|--------------|-----------------|------------------|------------------|------|
| Air HC     | Q-23g        | 48 kg           | up to 25 kg      | 450 W            | 10 A |
| Water HC   | Q-23g        | 48 kg           | up to 25 kg      | 450 W            | 10 A |
| Air HC DP  | Q-23g        | 48 kg           | up to 25 kg      | 450 W            | 10 A |

Sizes (WxDxH): 497 x 592 x 797\*\* mm; Net Weight: 46 kg

Package Dimensions (WxDxH): 550 x 660 x 970 mm; Gross Weight: 54 kg; Package Volume: 0,352 m<sup>3</sup>

## CB 640 B-QUBE






| Version                                                                                       | Kind of Cube | Production 24h* | Storage Capacity | Power consump.** | Fuse |
|-----------------------------------------------------------------------------------------------|--------------|-----------------|------------------|------------------|------|
| Air HC     | Q-23g        | 72 kg           | up to 40 kg      | 590 W            | 10 A |
| Water HC   | Q-23g        | 72 kg           | up to 40 kg      | 590 W            | 10 A |
| Air HC DP  | Q-23g        | 72 kg           | up to 40 kg      | 590 W            | 10 A |

Sizes (WxDxH): 735 x 603 x 850\*\* mm; Net Weight: 67 kg

Package Dimensions (WxDxH): 780 x 640 x 1015 mm; Gross Weight: 79 kg; Package Volume: 0,507 m<sup>3</sup>

## CB 840 B-QUBE



| Version                                                                                       | Kind of Cube | Production 24h* | Storage Capacity | Power consump.** | Fuse |
|-----------------------------------------------------------------------------------------------|--------------|-----------------|------------------|------------------|------|
| Air HC     | Q-23g        | 80 kg           | up to 40 kg      | 700 W            | 10 A |
| Water HC   | Q-23g        | 80 kg           | up to 40 kg      | 700 W            | 10 A |
| Air HC DP  | Q-23g        | 80 kg           | up to 40 kg      | 700 W            | 10 A |

Sizes (WxDxH): 735 x 603 x 910\*\* mm; Net Weight: 71 kg

Package Dimensions (WxDxH): 780 x 640 x 1085 mm; Gross Weight: 83 kg; Package Volume: 0,542 m<sup>3</sup>




\* Ambient temperature +21° C - Water temperature +15° C \*\* Ambient temperature +43° C

•• Plus adjustable foot 110 - 150 mm  
Photos are for representative purposes only

# CB Series

## CB 955 B-QUBE





| Version                                                                                     | Kind of Cube | Production 24h* | Storage Capacity | Power consump.** | Fuse |
|---------------------------------------------------------------------------------------------|--------------|-----------------|------------------|------------------|------|
| Air HC     | Q-23g        | 95 kg           | up to 55 kg      | 870 W            | 10 A |
| Water HC   | Q-23g        | 95 kg           | up to 55 kg      | 870 W            | 10 A |
| Air HC DP  | Q-23g        | 95 kg           | up to 55 kg      | 870 W            | 10 A |

Sizes (WxDxH): 735 x 603 x 1010\*\* mm; Net Weight: 74 kg

Package Dimensions (WxDxH): 780 x 640 x 1185 mm; Gross Weight: 86 kg; Package Volume: 0,592 m<sup>3</sup>

## CB 1265 B-QUBE






| Version                                                                                     | Kind of Cube | Production 24h* | Storage Capacity | Power consump.** | Fuse |
|---------------------------------------------------------------------------------------------|--------------|-----------------|------------------|------------------|------|
| Air HC     | Q-23g        | 134 kg          | up to 65 kg      | 900 W            | 16 A |
| Air HC DP  | Q-23g        | 134 kg          | up to 65 kg      | 900 W            | 16 A |

Sizes (WxDxH): 840 x 740 x 1075\*\* mm; Net Weight: 113 kg

Package Dimensions (WxDxH): 880 x 785 x 1245 mm; Gross Weight: 133 kg; Package Volume: 0,860 m<sup>3</sup>

## CB 1565 B-QUBE



| Version                                                                                       | Kind of Cube | Production 24h* | Storage Capacity | Power consump.** | Fuse |
|-----------------------------------------------------------------------------------------------|--------------|-----------------|------------------|------------------|------|
| Air HC     | Q-23g        | 152 kg          | up to 65 kg      | 1280 W           | 16 A |
| Water HC   | Q-23g        | 152 kg          | up to 65 kg      | 1280 W           | 16 A |
| Air HC DP  | Q-23g        | 152 kg          | up to 65 kg      | 1280 W           | 16 A |

Sizes (WxDxH): 840 x 740 x 1075\*\* mm; Net Weight: 118 kg



Package Dimensions (WxDxH): 880 x 785 x 1245 mm; Gross Weight: 138 kg; Package Volume: 0,860 m<sup>3</sup>

\* Ambient temperature +21° C - Water temperature +15° C \*\* Ambient temperature +43° C  
 • Plus foot 5 mm •• Plus adjustable foot 110 - 150 mm  
 Photos are for representative purposes only

# C Series

## C Series



| Version                                                                                    | Kind of Cube | Production 24h* | Usable bin                      | Power consump.** | Fuse |
|--------------------------------------------------------------------------------------------|--------------|-----------------|---------------------------------|------------------|------|
| Air HC    | Q-23g        | 150 kg          | Bin 240PE<br>Bin 200<br>Bin 350 | 1220 W           | 16 A |
| Water HC  | Q-23g        | 150 kg          | Bin 240PE<br>Bin 200<br>Bin 350 | 1220 W           | 16 A |

Sizes (WxDxH): 862 x 555 x 720 mm; Net Weight: 118 kg

Package Dimensions (WxDxH): 945 x 645 x 980 mm; Gross Weight: 128 kg; Package Volume: 0,597 m<sup>3</sup>




\* Ambient temperature +21° C - Water temperature +15° C    \*\* Ambient temperature +43° C  
 • Plus adjustable foot 110 - 150 mm  
 Photos are for representative purposes only

# Fast Ice



Usage

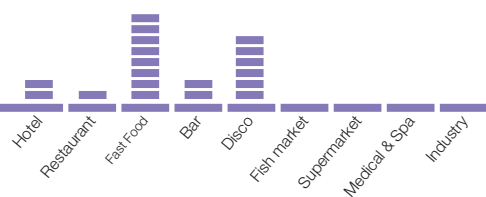

## VB Series



### VB 250



| Version                                                                                  | Kind of Cube | Production 24h* | Storage Capacity | Power consump.** | Fuse |
|------------------------------------------------------------------------------------------|--------------|-----------------|------------------|------------------|------|
| Air HC  | 7 g          | 95 kg           | up to 35 kg      | 675 W            | 10 A |

Sizes (WxDxH): 738 x 600 x 975<sup>••</sup> mm; Net Weight: 68,5 kg

Package Dimensions (WxDxH): 780 x 640 x 1120 mm; Gross Weight: 81 kg; Package Volume: 0,559 m<sup>3</sup>

\* Ambient temperature +21° C - Water temperature +15° C \*\* Ambient temperature +43° C

<sup>••</sup> Plus adjustable foot 110 - 150 mm  
Photos are for representative purposes only

# VM Series



## VM 900



| Version | Kind of Cube | Production 24h* | Usable bin           | Power consump.** | Fuse |
|---------|--------------|-----------------|----------------------|------------------|------|
| Air     | 7 g          | 400 kg          | Bin 240PE<br>Bin 200 | 3000 W           | 32 A |
| Water   | 7 g          | 400 kg          | Bin 350<br>DRB 100   | 3000 W           | 32 A |

Sizes (WxDxH): 770 x 550 x 805 mm; Net Weight: 113 kg

Package Dimensions (WxDxH): 815 x 615 x 980 mm; Gross Weight: 124 kg; Package Volume: 0,491 m<sup>3</sup>

## VM 1700



| Version | Kind of Cube | Production 24h* | Usable bin | Power consump.** | Fuse |
|---------|--------------|-----------------|------------|------------------|------|
| Air     | 7 g          | 770 kg          | Bin 350    | 4085 W           | 32 A |

Sizes (WxDxH): 1250 x 645 x 950 mm; Net Weight: 186 kg

Package Dimensions (WxDxH): 1350 x 745 x 1150 mm; Gross Weight: 242 kg; Package Volume: 1,157 m<sup>3</sup>



\* Ambient temperature +21° C - Water temperature +15° C    \*\* Ambient temperature +43° C  
Photos are for representative purposes only

# Ice Finger

Usage



## IMF Series



### IMF 26



| Version  | Kind of Cube | Production 24h* | Storage Capacity | Power consump.** | Fuse |
|----------|--------------|-----------------|------------------|------------------|------|
| Air HC   | 20 g         | 22 kg           | up to 4 kg       | 300 W            | 10 A |
| Water HC | 20 g         | 22 kg           | up to 4 kg       | 300 W            | 10 A |

Sizes (WxDxH): 387 x 470 x 607<sup>•</sup> mm; Net Weight: 36 kg

Package Dimensions (WxDxH): 440 x 520 x 770 mm; Gross Weight: 42 kg; Package Volume: 0,176 m<sup>3</sup>

### IMF 28



| Version  | Kind of Cube | Production 24h* | Storage Capacity | Power consump.** | Fuse |
|----------|--------------|-----------------|------------------|------------------|------|
| Air HC   | 20 g         | 22 kg           | up to 8 kg       | 300 W            | 10 A |
| Water HC | 20 g         | 22 kg           | up to 8 kg       | 300 W            | 10 A |

Sizes (WxDxH): 387 x 470 x 687<sup>•</sup> mm; Net Weight: 38 kg

Package Dimensions (WxDxH): 440 x 520 x 850 mm; Gross Weight: 45 kg; Package Volume: 0,194 m<sup>3</sup>

### IMF 35



| Version  | Kind of Cube | Production 24h* | Storage Capacity | Power consump.** | Fuse |
|----------|--------------|-----------------|------------------|------------------|------|
| Air HC   | 20 g         | 38 kg           | up to 15 kg      | 400 W            | 10 A |
| Water HC | 20 g         | 38 kg           | up to 15 kg      | 400 W            | 10 A |

Sizes (WxDxH): 497 x 582 x 687<sup>••</sup> mm; Net Weight: 47 kg

Package Dimensions (WxDxH): 550 x 630 x 850 mm; Gross Weight: 55 kg; Package Volume: 0,295 m<sup>3</sup>

\*Ambient temperature +21° C - Water temperature +15° C \*\* Ambient temperature +43° C  
<sup>•</sup> Plus foot 5 mm <sup>••</sup> Plus adjustable foot 110 - 150 mm  
 Photos are for representative purposes only

# IMF Series

## IMF 58



| Version                                                                                    | Kind of Cube | Production 24h* | Storage Capacity | Power consump.** | Fuse |
|--------------------------------------------------------------------------------------------|--------------|-----------------|------------------|------------------|------|
| Air HC    | 20 g         | 46 kg           | up to 20 kg      | 420 W            | 10 A |
| Water HC  | 20 g         | 46 kg           | up to 20 kg      | 420 W            | 10 A |

Sizes (WxDxH): 497 x 582 x 797\*\* mm; Net Weight: 54 kg

Package Sizes (WxDxH): 550 x 630 x 960 mm; Gross Weight: 62 kg; Package Volume: 0,333 m<sup>3</sup>

## IMF 80



| Version                                                                                    | Kind of Cube | Production 24h* | Storage Capacity | Power consump.** | Fuse |
|--------------------------------------------------------------------------------------------|--------------|-----------------|------------------|------------------|------|
| Air HC    | 20 g         | 85 kg           | up to 30 kg      | 480 W            | 10 A |
| Water HC  | 20 g         | 85 kg           | up to 30 kg      | 480 W            | 10 A |

Sizes (WxDxH): 735 x 598 x 907\*\* mm; Net Weight: 75 kg


Package Sizes (WxDxH): 780 x 640 x 1070 mm; Gross Weight: 87 kg; Package Volume: 0,534 m<sup>3</sup>



\* Ambient temperature +21° C - Water temperature +15° C    \*\* Ambient temperature +43° C

•• Plus adjustable foot 110 - 150 mm  
Photos are for representative purposes only

# Ice Pebbles

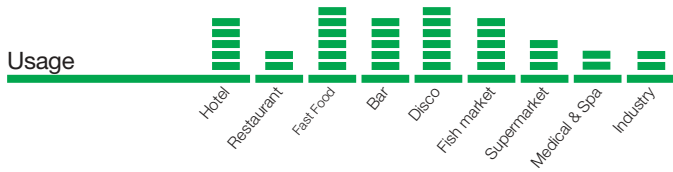

## TB Series



### TB 551



| Version  | Pebble*** mm | Production 24h* | Storage Capacity | Power consump.** | Fuse |
|----------|--------------|-----------------|------------------|------------------|------|
| Air HC   | 8x16x7       | 57 kg           | up to 10 kg      | 410 W            | 10 A |
| Water HC | 8x16x7       | 57 kg           | up to 10 kg      | 410 W            | 10 A |

Sizes (WxDxH): 450 x 620 x 680<sup>•</sup> mm; Net Weight: 56 kg

Package Dimensions (WxDxH): 505 x 675 x 850 mm; Gross Weight: 64 kg; Package Volume: 0,290 m<sup>3</sup>

### TB 852



| Version   | Pebble*** mm | Production 24h* | Storage Capacity | Power consump.** | Fuse |
|-----------|--------------|-----------------|------------------|------------------|------|
| Air HC    | 8x16x7       | 90 kg           | up to 20 kg      | 440 W            | 10 A |
| Water HC  | 8x16x7       | 90 kg           | up to 20 kg      | 440 W            | 10 A |
| Air HC DP | 8x16x7       | 90 kg           | up to 20 kg      | 440 W            | 10 A |

Sizes (WxDxH): 500 x 660 x 690<sup>••</sup> mm; Net Weight: 59 kg

Package Dimensions (WxDxH): 550 x 720 x 880 mm; Gross Weight: 67 kg; Package Volume: 0,348 m<sup>3</sup>

### TB 853



| Version   | Pebble*** mm | Production 24h* | Storage Capacity | Power consump.** | Fuse |
|-----------|--------------|-----------------|------------------|------------------|------|
| Air HC    | 8x16x7       | 90 kg           | up to 30 kg      | 440 W            | 10 A |
| Water HC  | 8x16x7       | 90 kg           | up to 30 kg      | 440 W            | 10 A |
| Air HC DP | 8x16x7       | 90 kg           | up to 30 kg      | 440 W            | 10 A |

Sizes (WxDxH): 500 x 660 x 800<sup>••</sup> mm; Net Weight: 67 kg

Package Dimensions (WxDxH): 550 x 720 x 990 mm; Gross Weight: 76 kg; Package Volume: 0,392 m<sup>3</sup>

\* Ambient temperature +21° C - Water temperature +15° C \*\* Ambient temperature +43° C \*\*\* Indicative dimensions  
<sup>•</sup> Plus foot 5 mm <sup>••</sup> Plus adjustable foot 110 - 150 mm  
 Photos are for representative purposes only

# TB Series

## TB 1404



| Version                                                                                    | Pebble***<br>mm | Production<br>24h* | Storage<br>Capacity | Power<br>consump.** | Fuse |
|--------------------------------------------------------------------------------------------|-----------------|--------------------|---------------------|---------------------|------|
| Air HC    | 8x16x7          | 142 kg             | up to 40 kg         | 720 W               | 10 A |
| Water HC  | 8x16x7          | 142 kg             | up to 40 kg         | 720 W               | 10 A |

Sizes (WxDxH): 738 x 690 x 851,5<sup>••</sup> mm; Net Weight: 90 kg

Package Dimensions (WxDxH): 780 x 735 x 1015 mm; Gross Weight: 100 kg; Package Volume: 0,582 m<sup>3</sup>

## TB 1405



| Version                                                                                    | Pebble***<br>mm | Production<br>24h* | Storage<br>Capacity | Power<br>consump.** | Fuse |
|--------------------------------------------------------------------------------------------|-----------------|--------------------|---------------------|---------------------|------|
| Air HC    | 8x16x7          | 146 kg             | up to 50 kg         | 720 W               | 10 A |
| Water HC  | 8x16x7          | 146 kg             | up to 50 kg         | 720 W               | 10 A |

Sizes (WxDxH): 738 x 690 x 1020<sup>••</sup> mm; Net Weight: 94 kg

Package Dimensions (WxDxH): 780 x 735 x 1185 mm; Gross Weight: 105 kg; Package Volume: 0,679 m<sup>3</sup>

\* Ambient temperature +21° C - Water temperature +15° C \*\* Ambient temperature +43° C \*\*\* Indicative dimensions



<sup>••</sup> Plus adjustable foot 110 - 150 mm  
Photos are for representative purposes only

# TM Series



## TM 140





| Version                                                                                    | Pebble***<br>mm | Production<br>24h* | Usable bin           | Power<br>consump.** | Fuse |
|--------------------------------------------------------------------------------------------|-----------------|--------------------|----------------------|---------------------|------|
| Air HC    | 8x16x7          | 130 kg             | Bin 240PE<br>Bin 110 | 700 W               | 10 A |
| Water HC  | 8x16x7          | 130 kg             | Bin 200<br>RB 100    | 700 W               | 10 A |

Sizes (WxDxH): 560 x 569 x 600 mm; Net Weight: 63 kg

Package Dimensions (WxDxH): 645 x 645 x 810 mm; Gross Weight: 74 kg; Package Volume: 0,337 m<sup>3</sup>

## TM 250





| Version                                                                                    | Pebble***<br>mm | Production<br>24h* | Usable bin                      | Power<br>consump.** | Fuse |
|--------------------------------------------------------------------------------------------|-----------------|--------------------|---------------------------------|---------------------|------|
| Air                                                                                        | 13x18x13        | 250 kg             | Bin 240PE<br>Bin 110<br>Bin 200 | 1050 W              | 10 A |
| Water                                                                                      | 13x18x13        | 250 kg             |                                 | 1050 W              | 10 A |
| Air HC    | 13x18x13        | 245 kg             | Bin 350<br>RB 100<br>DRB 100    | 1040 W              | 10 A |
| Water HC  | 13x18x13        | 245 kg             |                                 | 1040 W              | 10 A |

Sizes (WxDxH): 560 x 569 x 695 mm; Net Weight: 83 kg

Package Dimensions (WxDxH): 645 x 645 x 910 mm; Gross Weight: 93 kg; Package Volume: 0,379 m<sup>3</sup>

## TM 450



| Version                                                                                      | Pebble***<br>mm | Production<br>24h* | Usable bin                                        | Power<br>consump.** | Fuse |
|----------------------------------------------------------------------------------------------|-----------------|--------------------|---------------------------------------------------|---------------------|------|
| Air                                                                                          | 16,5x18x11      | 440 kg             | Bin 240PE<br>Bin 110<br>Bin 200<br>Bin 350        | 1730 W              | 16 A |
| Water                                                                                        | 16,5x18x11      | 440 kg             |                                                   | 1730 W              | 16 A |
| Air HC    | 16,5x18x11      | 375 kg             | Bin 550 V DS<br>RB 100<br>DRB 100/500<br>DRB 1200 | 1415 W              | 16 A |
| Water HC  | 16,5x18x11      | 375 kg             |                                                   | 1415 W              | 16 A |

Sizes (WxDxH): 560 x 569 x 695 mm; Net Weight: 102 kg

Package Dimensions (WxDxH): 645 x 645 x 910 mm; Gross Weight: 113 kg; Package Volume: 0,379 m<sup>3</sup>

\* Ambient temperature +21° C - Water temperature +15° C \*\* Ambient temperature +43° C \*\*\* Indicative dimensions  
Photos are for representative purposes only

# Special Series



## BSF



| Version                                                                                  | Pebble***<br>mm | Production<br>24h* | Usable bin | Power<br>consump.** | Fuse |
|------------------------------------------------------------------------------------------|-----------------|--------------------|------------|---------------------|------|
| Air HC  | 8x16x7          | 90 kg              | up to 5 kg | 440 W               | 10 A |


Sizes (WxDxH): 396 x 708 x 871<sup>•</sup> mm; Net Weight: 61 kg

Package Dimensions (WxDxH): 465 x 770 x 1040 mm; Gross Weight: 71,5 kg; Package Volume: 0,372 m<sup>3</sup>



\* Ambient temperature +21° C - Water temperature +15° C \*\* Ambient temperature +43° C \*\*\* Indicative dimensions  
<sup>•</sup> Plus foot 5 mm  
 Photos are for representative purposes only

# Ice Flakes

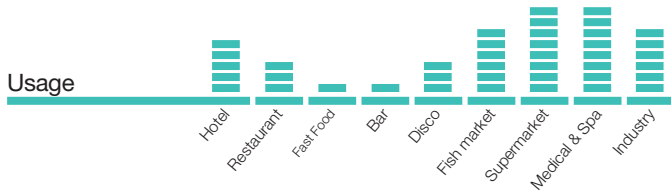

## GB Series



### GB 601



| Version   | Production 24h* | Storage Capacity | Power consump.** | Fuse |
|-----------|-----------------|------------------|------------------|------|
| Air HC    | 67 kg           | up to 9 kg       | 400 W            | 10 A |
| Water HC  | 67 kg           | up to 9 kg       | 400 W            | 10 A |
| Air HC DP | 67 kg           | up to 9 kg       | 400 W            | 10 A |

Sizes (WxDxH): 450 x 620 x 680<sup>•</sup> mm; Net Weight: 56 kg

Package Dimensions (WxDxH): 505 x 675 x 850 mm; Gross Weight: 64 kg; Package Volume: 0,290 m<sup>3</sup>

### GB 902



| Version   | Production 24h* | Storage Capacity | Power consump.** | Fuse |
|-----------|-----------------|------------------|------------------|------|
| Air HC    | 113 kg          | up to 20 kg      | 470 W            | 10 A |
| Water HC  | 113 kg          | up to 20 kg      | 470 W            | 10 A |
| Air HC DP | 113 kg          | up to 20 kg      | 470 W            | 10 A |

Sizes (WxDxH): 500 x 660 x 690<sup>••</sup> mm; Net Weight: 59 kg

Package Dimensions (WxDxH): 550 x 720 x 880 mm; Gross Weight: 67 kg; Package Volume: 0,348 m<sup>3</sup>

### GB 903



| Version   | Production 24h* | Storage Capacity | Power consump.** | Fuse |
|-----------|-----------------|------------------|------------------|------|
| Air HC    | 113 kg          | up to 30 kg      | 470 W            | 10 A |
| Water HC  | 113 kg          | up to 30 kg      | 470 W            | 10 A |
| Air HC DP | 113 kg          | up to 30 kg      | 470 W            | 10 A |

Sizes (WxDxH): 500 x 660 x 800<sup>••</sup> mm; Net Weight: 67 kg



Package Dimensions (WxDxH): 550 x 720 x 990 mm; Gross Weight: 76 kg; Package Volume: 0,392 m<sup>3</sup>

\* Ambient temperature +21° C - Water temperature +15° C    \*\* Ambient temperature +43° C  
<sup>•</sup> Plus foot 5 mm    <sup>••</sup> Plus adjustable foot 110 - 150 mm  
 Photos are for representative purposes only

# GB Series

## GB 1540






| Version                                                                                    | Production 24h* | Storage Capacity | Power consump.** | Fuse |
|--------------------------------------------------------------------------------------------|-----------------|------------------|------------------|------|
| Air HC    | 153 kg          | up to 40 kg      | 700 W            | 10 A |
| Water HC  | 153 kg          | up to 40 kg      | 700 W            | 10 A |

Sizes (WxDxH): 738 x 690 x 920<sup>••</sup> mm; Net Weight: 85 kg

Package Dimensions (WxDxH): 780 x 735 x 1085 mm; Gross Weight: 95 kg; Package Volume: 0,622 m<sup>3</sup>

## GB 1555



| Version                                                                                     | Production 24h* | Storage Capacity | Power consump.** | Fuse |
|---------------------------------------------------------------------------------------------|-----------------|------------------|------------------|------|
| Air HC     | 153 kg          | up to 55 kg      | 700 W            | 10 A |
| Water HC   | 153 kg          | up to 55 kg      | 700 W            | 10 A |
| Air HC DP  | 153 kg          | up to 55 kg      | 700 W            | 10 A |

Sizes (WxDxH): 738 x 690 x 1020<sup>••</sup> mm; Net Weight: 94 kg

Package Dimensions (WxDxH): 780 x 735 x 1185 mm; Gross Weight: 105 kg; Package Volume: 0,679 m<sup>3</sup>

\* Ambient temperature +21° C - Water temperature +15° C    \*\* Ambient temperature +43° C

<sup>••</sup> Plus adjustable foot 110 - 150 mm  
Photos are for representative purposes only

# G Series



## G 160



| Version  | Production 24h* | Usable bin           | Power consump.** | Fuse |
|----------|-----------------|----------------------|------------------|------|
| Air HC   | 157 kg          | Bin 240PE<br>Bin 110 | 830 W            | 10 A |
| Water HC | 157 kg          | Bin 200<br>RB 100    | 830 W            | 10 A |

Sizes (WxDxH): 560 x 569 x 600 mm; Net Weight: 63 kg

Package Dimensions (WxDxH): 645 x 645 x 810 mm; Gross Weight: 74 kg; Package Volume: 0,337 m<sup>3</sup>

## G 280



| Version  | Production 24h* | Usable bin           | Power consump.** | Fuse |
|----------|-----------------|----------------------|------------------|------|
| Air      | 280 kg          | Bin 240PE<br>Bin 110 | 1050 W           | 10 A |
| Water    | 280 kg          | Bin 200              | 1050 W           | 10 A |
| Air HC   | 280 kg          | Bin 350<br>RB 100    | 1100 W           | 10 A |
| Water HC | 280 kg          | DRB 100              | 1100 W           | 10 A |

Sizes (WxDxH): 560 x 569 x 695 mm; Net Weight: 83 kg

Package Dimensions (WxDxH): 645 x 645 x 910 mm; Gross Weight: 93 kg; Package Volume: 0,379 m<sup>3</sup>

## G 510



| Version  | Production 24h* | Usable bin              | Power consump.** | Fuse |
|----------|-----------------|-------------------------|------------------|------|
| Air      | 510 kg          | Bin 240PE<br>Bin 110    | 1700 W           | 16 A |
| Water    | 510 kg          | Bin 200<br>Bin 350      | 1700 W           | 16 A |
| Air HC   | 435 kg          | Bin 550 V DS<br>RB 100  | 1400 W           | 16 A |
| Water HC | 435 kg          | DRB 100/500<br>DRB 1200 | 1400 W           | 16 A |

Sizes (WxDxH): 560 x 569 x 695 mm; Net Weight: 102 kg

Package Dimensions (WxDxH): 645 x 645 x 910 mm; Gross Weight: 113 kg; Package Volume: 0,379 m<sup>3</sup>

## G 1000



| Version | Production 24h* | Usable bin              | Power consump.** | Fuse |
|---------|-----------------|-------------------------|------------------|------|
| Air     | 1000 kg         | Bin 550 V DS<br>DRB 500 | 2555 W           | 16 A |
| Water   | 1000 kg         | DRB 1200                | 2555 W           | 16 A |

Sizes (WxDxH): 934 x 684 x 700 mm; Net Weight: 177 kg

Package Dimensions (WxDxH): 995 x 765 x 890 mm; Gross Weight: 207 kg; Package Volume: 0,677 m<sup>3</sup>

\* Ambient temperature +21° C - Water temperature +15° C \*\* Ambient temperature +43° C  
Photos are for representative purposes only

# G Series

## G 510/700 Split



| Version                     | Production 24h* | Usable bin                                        | Power consump.** | Cooling Capacity |
|-----------------------------|-----------------|---------------------------------------------------|------------------|------------------|
| G 510 Split                 | 510 kg          | Bin 240PE<br>Bin 110<br>Bin 200<br>Bin 350        | 175 W            | 2300 W■          |
| G 700 Split CO <sub>2</sub> | 720 kg          | Bin 550 V DS<br>RB 100<br>DRB 100/500<br>DRB 1200 | 175 W            | 2300 W■          |

Sizes (WxDxH): 560 x 569 x 695 mm; Net Weight: 67 kg

Package Dimensions (WxDxH): 645 x 645 x 910 mm; Gross Weight: 77 kg; Package Volume: 0,379 m<sup>3</sup>

## G 1000/1400 Split



| Version                      | Production 24h* | Usable bin              | Power consump.** | Cooling Capacity |
|------------------------------|-----------------|-------------------------|------------------|------------------|
| G 1000 Split                 | 1000 kg         | Bin 550 V DS<br>DRB 500 | 350 W            | 4600 W■          |
| G 1400 Split CO <sub>2</sub> | 1400 kg         | DRB 1200                | 350 W            | 4600 W■          |


Sizes (WxDxH): 765 x 600 x 695 mm; Net Weight: 118 kg

Package Dimensions (WxDxH): 860 x 690 x 890 mm; Gross Weight: 132 kg; Package Volume: 0,528 m<sup>3</sup>



\* Ambient temperature +21° C - Water temperature +15° C    \*\* Ambient temperature +43° C  
 ■ Evaporation temperature -18° C  
 Photos are for representative purposes only

# Ice Scales

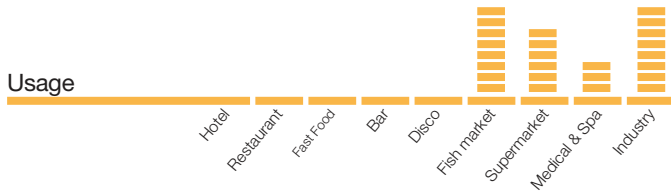

## Muster Series



### Muster 250



| Version | Production 24h* | Usable bin         | Power consump.** | Fuse |
|---------|-----------------|--------------------|------------------|------|
| Air     | 250 kg          | Bin 200<br>Bin 350 | 1700 W           | 16 A |
| Water   | 250 kg          |                    | 1700 W           | 16 A |

Sizes (WxDxH): 870 x 550 x 600 mm; Net Weight: 100 kg

Package Dimensions (WxDxH): 955 x 625 x 770 mm; Gross Weight: 120 kg; Package Volume: 0,460 m<sup>3</sup>

### Muster 350



| Version | Production 24h* | Usable bin                         | Power consump.** | Fuse |
|---------|-----------------|------------------------------------|------------------|------|
| Air     | 400 kg          | Bin 350<br>Bin 550 V DS<br>DRB 100 | 2140 W           | 16 A |
| Water   | 400 kg          |                                    | 2140 W           | 16 A |

Sizes (WxDxH): 900 x 588 x 705 mm; Net Weight: 137 kg

Package Dimensions (WxDxH): 965 x 655 x 880 mm; Gross Weight: 152 kg; Package Volume: 0,556 m<sup>3</sup>

### Muster 600



| Version | Production 24h* | Usable bin                                                | Power consump.** | Fuse |
|---------|-----------------|-----------------------------------------------------------|------------------|------|
| Air     | 620 kg          | Bin 350<br>Bin 550 V DS<br>DRB 100<br>DRB 500<br>DRB 1200 | 2565 W           | 16 A |
| Water   | 620 kg          |                                                           | 2565 W           | 16 A |

Sizes (WxDxH): 900 x 588 x 705 mm; Net Weight: 151 kg

Package Dimensions (WxDxH): 965 x 655 x 880 mm; Gross Weight: 166 kg; Package Volume: 0,556 m<sup>3</sup>

\* Ambient temperature +21° C - Water temperature +15° C \*\* Ambient temperature +43° C  
Photos are for representative purposes only

# Muster Series

## Muster 800



| Version | Production 24h* | Usable bin                          | Power consump.** | Fuse |
|---------|-----------------|-------------------------------------|------------------|------|
| Air     | 900 kg          | Bin 550 V DS<br>DRB 500<br>DRB 1200 | 3205 W           | 16 A |
| Water   | 900 kg          |                                     | 3205 W           | 16 A |

Sizes (WxDxH): 1107 x 700 x 880 mm; Net Weight: 241 kg

Package Dimensions (WxDxH): 1210 x 800 x 1095 mm; Gross Weight: 262 kg; Package Volume: 1,060 m<sup>3</sup>

## Muster 1500



| Version | Production 24h* | Usable bin              | Power consump.*** | Fuse |
|---------|-----------------|-------------------------|-------------------|------|
| Air     | 1500 kg         | Bin 550 V DS<br>DRB 500 | 6000 W            | 32 A |
| Water   | 1500 kg         |                         | 6000 W            | 32 A |

Sizes (WxDxH): 1107 x 700 x 970 mm; Net Weight: 306 kg

Package Dimensions (WxDxH): 1210 x 800 x 1185 mm; Gross Weight: 342 kg; Package Volume: 1,147 m<sup>3</sup>

## Muster 2000



| Version | Production 24h* | Usable bin | Power consump.*** | Fuse |
|---------|-----------------|------------|-------------------|------|
| Air     | 2231 kg         | --         | 6650 W            | 32 A |

Sizes (WxDxH): 1062 x 832 x 1423 mm; Net Weight: 520 kg

Package Dimensions (WxDxH): 1150 x 960 x 1700 mm; Gross Weight: 570 kg; Package Volume: 1,877 m<sup>3</sup>

\* Ambient temperature +21° C - Water temperature +15° C    \*\* Ambient temperature +43° C    \*\*\* Ambient temperature +21° C  
Photos are for representative purposes only

# Muster Series

## Muster 350 Split



| Version   | Production 24h* | Usable bin                         | Power consump.** | Cooling capacity |
|-----------|-----------------|------------------------------------|------------------|------------------|
| 350 Split | 400 kg          | Bin 350<br>Bin 550 V DS<br>DRB 100 | 180 W            | 2200 W■■■        |

Sizes (WxDxH): 495 x 588 x 705 mm; Net Weight: 66 kg

Package Dimensions (WxDxH): 550 x 655 x 900 mm; Gross Weight: 82 kg; Package Volume: 0,324 m<sup>3</sup>

## Muster 600 Split



| Version                   | Production 24h* | Usable bin                         | Power consump.** | Cooling capacity |
|---------------------------|-----------------|------------------------------------|------------------|------------------|
| 600 Split                 | 620 kg          | Bin 350<br>Bin 550 V DS<br>DRB 100 | 180 W            | 3500 W■■         |
| 600 Split CO <sub>2</sub> | 620 kg          | DRB 500<br>DRB 1200                | 180 W            | 3500 W■■■        |

Sizes (WxDxH): 495 x 588 x 705 mm; Net Weight: 73 kg

Package Dimensions (WxDxH): 550 x 655 x 900 mm; Gross Weight: 89 kg; Package Volume: 0,324 m<sup>3</sup>

## Muster 800 Split



| Version                    | Production 24h* | Usable bin              | Power consump.** | Cooling capacity |
|----------------------------|-----------------|-------------------------|------------------|------------------|
| 800 Split                  | 900 kg          | Bin 550 V DS<br>DRB 500 | 180 W            | 5000 W■■■        |
| 1000 Split CO <sub>2</sub> | 1040 kg         | DRB 1200                | 180 W            | 5000 W■■■        |

Sizes (WxDxH): 604 x 700 x 880 mm; Net Weight: 138 kg

Package Dimensions (WxDxH): 655 x 785 x 1055 mm; Gross Weight: 153 kg; Package Volume: 0,542 m<sup>3</sup>

## Muster 1500 Split



| Version                    | Production 24h* | Usable bin              | Power consump.** | Cooling capacity |
|----------------------------|-----------------|-------------------------|------------------|------------------|
| 1500 Split                 | 1500 kg         | Bin 550 V DS<br>DRB 500 | 180 W            | 8550 W■■■■       |
| 1500 Split CO <sub>2</sub> | 1520 kg         |                         | 180 W            | 8550 W■■■        |

Sizes (WxDxH): 604 x 700 x 970 mm; Net Weight: 144 kg

Package Dimensions (WxDxH): 655 x 785 x 1145 mm; Gross Weight: 160 kg; Package Volume: 0,589 m<sup>3</sup>

\* Ambient temperature +21° C - Water temperature +15° C \*\* Ambient temperature +43° C

■■ Evaporation temperature; -22° ■■■ Evaporation temperature: -23° ■■■■ Evaporation temperature: -24°  
Photos are for representative purposes only

# Muster Series

## Muster 2000 Split



| Version    | Production 24h* | Usable bin | Power consump.** | Cooling capacity |
|------------|-----------------|------------|------------------|------------------|
| 2000 Split | 2300 kg         | --         | 180 W            | 12000 W■■■■■     |

Sizes (WxDxH): 736 x 832 x 1075 mm; Net Weight: 300 kg

Package Dimensions (WxDxH): 830 x 946 x 1345 mm; Gross Weight: 328 kg; Package Volume: 1,056 m<sup>3</sup>

## Muster 5000 Split



| Version    | Production 24h* | Usable bin | Power consump.** | Cooling capacity |
|------------|-----------------|------------|------------------|------------------|
| 5000 Split | 5000 kg         | --         | 360 W            | 25000 W■■■■■     |

Sizes (WxDxH): 1270 x 1015 x 1076 mm; Net Weight: 600 kg

Package Dimensions (WxDxH): 1394 x 1139 x 1420 mm; Gross Weight: 620 kg; Package Volume: 2,255 m<sup>3</sup>



\* Ambient temperature +21° C - Water temperature +15° C    \*\* Ambient temperature +43° C

■■■■■ Evaporation temperature: -27°  
Photos are for representative purposes only

# Bin Series

Choose the bin that best suits your needs!



| Bin 240 PE | Bin 110 | Bin 200 | Bin 350 | Bin 550 V DS | RB 100 | DRB 100 | DRB 500 | DRB 1200 |
|------------|---------|---------|---------|--------------|--------|---------|---------|----------|
|------------|---------|---------|---------|--------------|--------|---------|---------|----------|

|            |     |  |     |     |  |  |  |  |
|------------|-----|--|-----|-----|--|--|--|--|
| C 150 HC   | (B) |  | (B) | (B) |  |  |  |  |
| C 300      |     |  |     | (B) |  |  |  |  |
| C300 Split |     |  |     | (B) |  |  |  |  |

|         |     |  |     |     |  |  |     |  |
|---------|-----|--|-----|-----|--|--|-----|--|
| VM 900  | (B) |  | (B) | (B) |  |  | (B) |  |
| VM 1700 |     |  |     | (B) |  |  |     |  |

|           |     |     |     |     |     |     |     |     |
|-----------|-----|-----|-----|-----|-----|-----|-----|-----|
| TM 140 HC | (B) | (B) | (B) |     |     | (B) |     |     |
| TM 250    | (B) | (B) | (B) | (B) |     | (B) | (B) |     |
| TM 450    | (B) | (B) | (B) | (B) | (B) | (B) | (B) | (B) |

|                              |     |     |     |     |     |     |     |     |
|------------------------------|-----|-----|-----|-----|-----|-----|-----|-----|
| G 160 HC                     | (B) | (B) | (B) |     |     | (B) |     |     |
| G 280                        | (B) | (B) | (B) | (B) |     | (B) | (B) |     |
| G 510                        | (B) | (B) | (B) | (B) | (B) | (B) | (B) | (B) |
| G 1000                       |     |     |     |     | (B) |     |     | (B) |
| G 510 Split                  | (B) | (B) | (B) | (B) | (B) | (B) | (B) | (B) |
| G 700 Split CO <sub>2</sub>  | (B) | (B) | (B) | (B) | (B) | (B) | (B) | (B) |
| G 1000 Split                 |     |     |     |     | (B) |     |     | (B) |
| G 1400 Split CO <sub>2</sub> |     |     |     |     | (B) |     |     | (B) |

|                              |  |  |     |     |     |  |     |     |
|------------------------------|--|--|-----|-----|-----|--|-----|-----|
| M 250                        |  |  | (B) | (B) |     |  |     |     |
| M 350                        |  |  |     | (B) | (B) |  | (B) |     |
| M 600                        |  |  |     | (B) | (B) |  | (B) | (B) |
| M 800                        |  |  |     |     | (B) |  |     | (B) |
| M 1500                       |  |  |     |     | (B) |  |     | (B) |
| M 350 Split                  |  |  |     | (B) | (B) |  | (B) |     |
| M 600 Split/CO <sub>2</sub>  |  |  |     | (B) | (B) |  | (B) | (B) |
| M 800 Split                  |  |  |     |     | (B) |  |     | (B) |
| M 1000 Split CO <sub>2</sub> |  |  |     |     | (B) |  |     | (B) |
| M 1500 Split/CO <sub>2</sub> |  |  |     |     | (B) |  |     | (B) |

# Ice Bin



## Bin Series



### ID 70



| Storage capacity | Kind of Cube*** | Usable with | Power consump.** | Finish                                 |
|------------------|-----------------|-------------|------------------|----------------------------------------|
| 21 kg            | 13x18x13        | TM 250      | 240 W            | Stainless steel AISI 304, Scotch Brite |

Sizes (WxDxH): 568 x 800 x 817 • mm; Net Weight: 58 kg

Package Dimensions (WxDxH): 600 x 900 x 1030 mm; Gross Weight: 66 kg; Package Volume: 0,556 m<sup>3</sup>

### Bin 240 PE



| Storage capacity | Usable with                                                                           | Finish                                 |
|------------------|---------------------------------------------------------------------------------------|----------------------------------------|
| 180 kg           | C 150 - VM 900<br>G 160/280/510/510 Split/700 Split CO <sub>2</sub><br>TM 140/250/450 | Polyethylene suitable for food contact |

Sizes (WxDxH): 942 x 795 x 1053\*\*\* mm; Net Weight: 64 kg

Package Dimensions (WxDxH): 1035 x 885 x 1275 mm; Gross Weight: 79 kg; Package Volume: 1,168 m<sup>3</sup>

### Bin 110



| Storage capacity | Usable with                                                         | Finish                                 |
|------------------|---------------------------------------------------------------------|----------------------------------------|
| 100 kg           | G 160/280/510/510 Split/700 Split CO <sub>2</sub><br>TM 140/250/450 | Stainless steel AISI 304, Scotch Brite |

Sizes (WxDxH): 560 x 815 x 1000\*\*\* mm; Net Weight: 53 kg

Package Dimensions (WxDxH): 20 x 880 x 1175 mm; Gross Weight: 65 kg; Package Volume: 0,641 m<sup>3</sup>

• Plus foot 5 mm    \*\*\* Plus adjustable foot 100 - 160 mm    \*\* Ambient temperature +43° C  
Photos are for representative purposes only

# Bin Series

## Bin 200



| Storage capacity | Usable with                                                                                   | Finish                                    |
|------------------|-----------------------------------------------------------------------------------------------|-------------------------------------------|
| 200 kg           | C 150 - VM 900<br>G 160/280/510/510 Split/700 Split CO <sub>2</sub><br>TM 140/250/450 - M 250 | Stainless steel AISI 304,<br>Scotch Brite |

Sizes (WxDxH): 870 x 815 x 1000\*\*\* mm; Net Weight: 63 kg

Package Dimensions (WxDxH): 920 x 850 x 1175 mm; Gross Weight: 78 kg; Package Volume: 0,919 m<sup>3</sup>

## Bin 350



| Storage capacity | Usable with                                                                                                                                                              | Finish                                    |
|------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------|
| 350 kg           | C 150/300/300 Split<br>VM 500/900/1700<br>G 280/510/510 Split/700 Split CO <sub>2</sub><br>TM 250/450 - M 250/350/600<br>M 350 Split/600 Split/600 Split CO <sub>2</sub> | Stainless steel AISI 304,<br>Scotch Brite |

Sizes (WxDxH): 1250 x 815 x 1000\*\*\* mm; Net Weight: 102 kg

Package Dimensions (WxDxH): 1300 x 850 x 1180 mm; Gross Weight: 120,5 kg; Package Volume: 1,304 m<sup>3</sup>

## Bin 550 V DS



| Storage capacity | Usable with                                                                                                                                                                                                                                                      | Finish                                    |
|------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------|
| 550 kg           | G 510/510 Split/700 Split CO <sub>2</sub><br>G 1000/1000 Split/1400 Split CO <sub>2</sub><br>TM 450 - M 350/600/800/1500<br>M 350 Split/600 Split/600 Split CO <sub>2</sub><br>M 800 Split/1000 Split CO <sub>2</sub><br>M 1500 Split/1500 Split CO <sub>2</sub> | Stainless steel AISI 304,<br>Scotch Brite |

Sizes (WxDxH): 1110 x 1060 x 1915 mm; Net Weight: 163 kg

Package Dimensions (WxDxH): 1280 x 1235 x 1960 mm; Gross Weight: 177 kg; Package Volume: 3,098 m<sup>3</sup>

## RB 100



| Storage capacity                     | Usable with                                                                  | Finish                                    |
|--------------------------------------|------------------------------------------------------------------------------|-------------------------------------------|
| Trolley<br>108 kg<br>Bay store 17 kg | G 160/280/510<br>G 510/510 Split/700 Split CO <sub>2</sub><br>TM 140/250/450 | Stainless steel AISI 304,<br>Scotch Brite |

Sizes (WxDxH): 795 x 1060 x 1284 mm; Net Weight: 64 kg

Package Dimensions (WxDxH): 860 x 1125 x 1145 mm; Gross Weight: 80 kg; Package Volume: 1,108 m<sup>3</sup>

\*\*\* Plus adjustable foot 100 - 160 mm  
Photos are for representative purposes only

# Bin Series

## DRB 100



| Storage capacity                         | Usable with                                                                                                                          | Finish                                    |
|------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------|
| Trolley<br>108 kg x 2<br>Bay Store 50 kg | VM 900<br>G 280/510/510 Split/700 Split CO <sub>2</sub><br>TM 250/450 - M 350/600<br>M 350 Split/600 Split/600 Split CO <sub>2</sub> | Stainless steel AISI 304,<br>Scotch Brite |

Sizes (WxDxH): 1560 x 1060 x 1484 mm; Net Weight: 183 kg

Package Dimensions (WxDxH): 1630 x 1200 x 1670 mm; Gross Weight: 223 kg; Package Volume: 3,267 m<sup>3</sup>

## DRB 500



| Storage capacity                          | Usable with                                                                                                                                                                                                                                        | Finish                                    |
|-------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------|
| Trolley<br>108 kg x 2<br>Bay Store 300 kg | G 510/510 Split/700 Split CO <sub>2</sub><br>G 1000/1000 Split/1400 Split CO <sub>2</sub><br>TM 450 - M 600/800/1500<br>M 600 Split/600 Split CO <sub>2</sub><br>M 800 Split/1000 Split CO <sub>2</sub><br>M 1500 Split/1500 Split CO <sub>2</sub> | Stainless steel AISI 304,<br>Scotch Brite |

Sizes (WxDxH): 1560 x 1330 x 1810 mm; Net Weight: 204 kg

Package Dimensions N°1 (WxDxH): 1630 x 1200 x 1150 mm; Package Volume N°1: 2,249 m<sup>3</sup>

Package Dimensions N°2 (WxDxH): 1630 x 1420 x 1050 mm; Package Volume N°2: 2,430m<sup>3</sup>

Gross Weight: 307 kg;

## DRB 1200



| Storage capacity                           | Usable with                                                                                                                                                                                        | Finish                                    |
|--------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------|
| Trolley<br>108 kg x 2<br>Bay Store 1000 kg | G 510/510 Split/700 Split CO <sub>2</sub><br>G 1000/1000 Split/1400 Split CO <sub>2</sub><br>TM 450 - M 600/800<br>M 600 Split/600 Split CO <sub>2</sub><br>M 800 Split/1000 Split CO <sub>2</sub> | Stainless steel AISI 304,<br>Scotch Brite |

Sizes (WxDxH): 1560 x 1330 x 2490 mm; Net Weight: 251 kg

Package Dimensions N°1 (WxDxH): 1630 x 1200 x 1150 mm; Package Volume N°1 da: 2,249 m<sup>3</sup>

Package Dimensions N°2 (WxDxH): 1630 x 1420 x 1050 mm; Package Volume N°2 da: 2,430 m<sup>3</sup>

Package Dimensions N°3 (WxDxH): 1630 x 1200 x 800 mm; Package Volume N°3 da: 1,565 m<sup>3</sup>

Gross Weight: 404 kg;

# Accessories



## V221328 - Support for HIKU 26



Made of stainless steel  
Specific for HIKU 26;

Sizes (WxDxH): 350 x 515 x 555 mm;

Feet H = 100 / 150 mm;

## V221651 - Support for ID 70



Made of stainless steel  
Specific for ID 70;

Sizes (WxDxH): 568 x 719 x 552 mm;

Feet H = 100 / 150 mm;

V221651

## C27766 - Remote Electrical Box



It is equipped with:

- a selector that allows you to choose operation Manual or Automatic (through the timer);
- a timer that allows you to program the switching on and off of the device several times during the day, with possible weekly programming;
- three indicator lights indicating the operating status;
- combinable with all our Muster models, also in Split version, with the exception of M5000 and M5000 Split.

## 23796 - Saline Solution Dosing Pump



Saltwater dosing pump;

To be applied on our Muster models, including the Split version

## CONDM350 - Ice Drop Channel for M350/600 M350/600 Split - M600 Split CO<sub>2</sub>



It is made of plastic material suitable for contact with foodstuff.  
It is suggested to convey the ice into a bin below, when machines are installed on cold rooms and/or on a support structures.

Usable with M350/600 - M350/600 Split - M600 Split CO<sub>2</sub>.  
Sizes (WxDxH): 376 x 376 x 660 mm;

## DIVCONDM350 - Y Ice Channel for M350/600 M350/600 Split - M600 Split CO<sub>2</sub>



It is made of plastic material suitable for contact with foodstuff.  
Suggested for the coupling with Ice Drop Channel for M350/600 M350/600 Split - M600 Split CO<sub>2</sub>.

Sizes (WxDxH): 714 x 365 x 600 mm;

# Accessories

## CONDM800 - Ice Drop Channel for M800/1500 M800/1500 Split - M1000/1500 Split CO<sub>2</sub>



It is made of plastic material suitable for contact with foodstuff.  
It is suggested to convey the ice into a bin below, when machines are installed on cold rooms and/or on a support structures.

Usable with M800/1500 - M800/1500 Split - M1000/1500 Split CO<sub>2</sub>  
Sizes (WxDxH): 477 x 477 x 804 mm;

## CONDM2000 - Ice Drop Channel for M2000 - M2000 Split



It is made of plastic material suitable for contact with foodstuff.  
It is suggested to convey the ice into a bin below, when machines are installed on cold rooms and/or on a support structures.

Usable with with M2000 - M2000 Split.  
Sizes (WxDxH): 622 x 622 x 1004 mm;

## 201041 - Extensor Stainless Steel Ø 300



Made of stainless steel.  
Suggested for the coupling with Ice Drop Channel for M800/1500 M800/1500 Split - M1000/1500 Split CO<sub>2</sub> and Ice Drop Channel for M2000 - M2000 Split.

Sizes (WxDxH): 935 x Ø300,5 mm;

## DIVCONDM800 - Y Ice Channel for M800/1500/2000 M800/1500/2000 Split - M1000/1500 Split CO<sub>2</sub>



It is made of plastic material suitable for contact with foodstuff.  
Suggested for the coupling with Ice Drop Channel for M800/1500 M800/1500 Split - M1000/1500 Split CO<sub>2</sub> and Ice Drop Channel for M2000 - M2000 Split.

Sizes (WxDxH): 714 x 365 x 520 mm;

## C27774 - Infrared Photocell



Can only be combined with our Y Ice Chute for:  
M350/600 - M350/600 Split - M600 Split CO<sub>2</sub>  
M800/1500 - M800/1500 Split - M1000/1500 Split CO<sub>2</sub>  
M2000 - M2000 Split.

## CONDG - Ice Chute Channel for G and TM Series



Made of stainless steel.  
Suggested for the G and TM models, Split version too.  
It is suggested to convey the ice into a bin below, when machines are installed on cold rooms and/or on support structures.

Sizes: 990 x Ø109 mm;

# Accessories

## Kit Cleaner



Ice Machine Cleaner specific for Brema ice machine makers, odourless and colourless.

Pack with 24 bags, each weighing 55g

## 19157 - Showel



Showel made of resin, suitable for contact with foodstuff, necessary for the ice handling;

Recommended for DRB 500 - DRB 1200 - BIN 550V DS.

## V10377 - Ice Trolley



Plastic moulded trolley, suitable for contact with foodstuff, insulated to guarantee the perfect ice preservation. Supplied on 4 wheels with pedal lock and with a front knob that allows water drainage when not in motion.

Sizes (WxDxH): 670 x 1030 x 875 mm;

## 10318 - Basket for Trolley



Made of plastic, suitable for contact with foodstuff. It has been specifically designed to be inserted into our trolleys (each trolley can hold up to 6 baskets).

Sizes (WxDxH): 250 x 250 x 520 mm;

## V231511 - UVC Lamp for Water Sanification



UVC lamp with an innovative and compact design, suitable for safe disinfection of drinking water. The lamps are switched on by a turbine that activates the electronic board and the lamps only when water passes through, ensuring low energy consumption and a long system life.

Sizes (WxDxH): 200 x 42 x 80 mm;

## V20296 - Filter Head Assembly



It can be used for the filters we suggest.

# Accessories

## V201314 - Filter Assembly Small



Recommended for ice makers with cooled water dispenser.

Composed by:

- filter head
- Cartridge containing active carbon that purifies water and a filter which reduces water impurities.

## 201314 - i500<sup>2</sup> Filter Cartridge - Small



Cartridge containing active carbon that purifies water and filter which reduces water impurities.

## V201315 - Filter Assembly Medium



Suggested for ice makers with a production capacity of 20 kg to 46 kg in 24 hours

Composed by:

- filter head
- cartridge containing a resin that controls limescale and bacteria in the water and a filter to reduce the impurities contained in it.

## 201315 - i2000<sup>2</sup> Filter Cartridge - Medium



Cartridge containing a resin that controls limescale and bacteria in the water and a filter that eliminates water impurities.

## V201316 - Filter Assembly Large



Suggested for ice makers with a production of 60 kg or more in 24 hours

Composed of:

- filter head
- cartridge containing a resin that controls limescale and bacteria in the water and a filter that eliminates water impurities.

## 201316 - i4000<sup>2</sup> Filter Cartridge - Large



Cartridge containing a resin that controls limescale and bacteria in the water and a filter to reduce the impurities contained in it.

# Accessories

## Remote Condensing Unit for G 510 Split



Pre-charged condensing unit ready for a remote installation of our G 510 Split model.  
Equipped with a hermetic compressor, whose noise level is extremely low.  
The external panelling has been designed to allow immediate access to the equipment, thus ensuring easy maintenance.

Power consumption: 1909 W  
Sizes (WxDxH): 1156 x 420 x 785 mm  
Net weight: 87 kg  
Refrigerant: R452A

## Remote Condensing Unit for 350 Split



Pre-charged condensing unit ready for remote installation of our M 350 Split model.  
Equipped with a hermetic compressor, whose noise level is extremely low.  
The external panelling has been designed to allow immediate access to the equipment, thus ensuring easy maintenance.

Power consumption: 2356 W  
Sizes (WxDxH): 1156 x 420 x 785 mm  
Net weight: 87 kg  
Refrigerant: R452A

## Remote Condensing Unit for M 600/800 Split, G 1000 Split and C 300 Split Remote



Pre-charged condensing unit ready for remote installation of our M 600 Split, M 800 Split, G 1000 Split and C 300 Split models.  
Equipped with a hermetic compressor, whose noise level is extremely low.  
The external panelling has been designed to allow immediate access to the equipment, thus ensuring easy maintenance.

Power consumption: 3524 W  
Sizes (WxDxH): 1306 x 470 x 1160 mm  
Net weight: 121 kg  
Refrigerant: R452A

Photos are for representative purposes only

# Accessories

## Remote Condensing Unit for M 1500 Split



Pre-charged condensing unit ready for remote installation of our M 1500 Split model.  
Equipped with a hermetic compressor, whose noise level is extremely low.  
The external panelling has been designed to allow immediate access to the equipment, thus ensuring easy maintenance.

Power consumption: 7655 W  
Sizes (WxDxH): 1750 x 946 x 1497 mm  
Net weight: 428 kg  
Refrigerant: R452A

## Remote Condensing Unit for M 2000 Split



Pre-charged condensing unit ready for remote installation of our M 2000 Split model.  
Equipped with a hermetic compressor, whose noise level is extremely low.  
The external panelling has been designed to allow immediate access to the equipment, thus ensuring easy maintenance.

Power consumption: 10078 W  
Sizes (WxDxH): 1750 x 946 x 1497 mm  
Net weight: 462 kg  
Refrigerant: R452A

# Icon legend



*CO<sub>2</sub> application*



RoHS Free



*R290 propane refrigerant*



Sprayer System  
Technology



Vertical System  
Technology



Paddle System  
Technology



Pebbles System  
Technology



Granular System  
Technology



Scale System  
Technology



*AISI 304 SS Scotch  
Brite finishing*



*Tropical class +43°C*



*Cleanable antiscaling filter*



*Removable and  
cleanable air filter*



*Easy cleanable internal  
rounded surfaces*



*HCFC-Free insulated  
storage*



*Electromechanical  
operation*



*ON/OFF rocker switch*



*Drain pump*



*Automatic washing  
system*



*Rotation sensor on low  
speed shaft*



*1l (water) - 1kg (ice)  
- only Air cooled*




*Dust-proof  
water basin*



*Specific volume  
1 m<sup>3</sup> = 550 kg of ice*




*Specific volume  
1 m<sup>3</sup> = 430 kg of ice*




# Kind of cubes

## Ice Cube

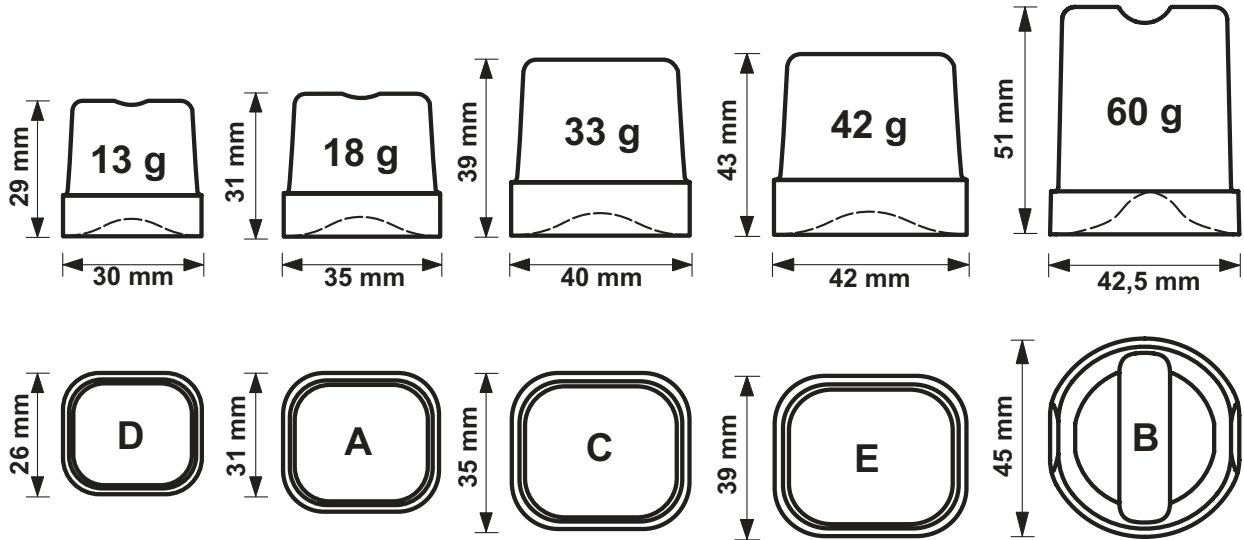


## B-Qube




23 g  
H 31.5 x L 32.5 mm


## Ice Finger



## Fast Ice

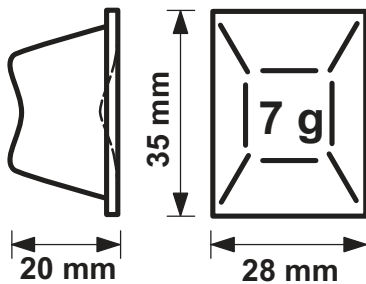

## Ice Pebbles

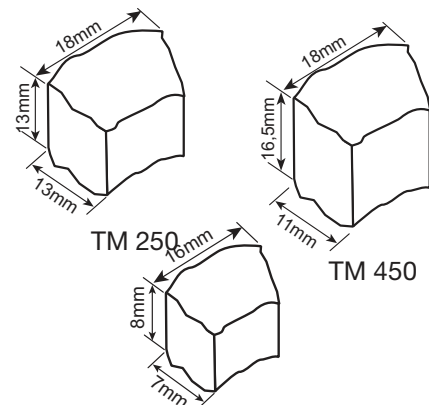

TM 140 - TB Series

Approximative size

# Kit Cleaner

Odourless and colourless, ideal for effective and safe cleaning of ice makers

The Kit Cleaner is the solution designed by Brema Group to simplify routine maintenance of ice machines and ensure consistent performance and optimal cleaning conditions over time.

It can be used both in the AWS self-cleaning cycle and for removable parts, for complete care without complications.




The kit is compatible with the machines in the CB Ice Cube and B-Qube families.

## What it is used for


This kit is ideal for:



Remove limescale residues and impurities.



Maintaining the efficiency of the production cycle.



Extend the service life of machines.



Prevent malfunctions caused by poor internal cleanliness.



Do you want a machine as clean as me? Watch the video!



**#IceisBrema**

[www.bremaice.it](http://www.bremaice.it)



### Telephone

0331 43 48 11



### Headquarter

Via dell'Industria 10  
20035 Villa Cortese (MI), Italia




### Web & Mail

[www.bremagroup.it](http://www.bremagroup.it)  
[info@bremaicegroup.it](mailto:info@bremaicegroup.it)



Explore our  
website!



 **Connected**



 **BREMA GROUP**  
N'Ice by Nature 

Brema Group S.p.A. with sole shareholder subject to the management and coordination of Hoshizaki Corporation  
Via dell'Industria, 10 - 20035 Villa Cortese (MI), Italy - Tel. +39 0331 434811 - [info@bremaicegroup.it](mailto:info@bremaicegroup.it) - [www.bremagroup.it](http://www.bremagroup.it)  
Tax code and VAT number 09290260158 | Milan register of companies 1281855 |  
Share capital € 208.000 i.v. | N° AEE: IT08010000000200